MATRIX R2

Body, Tires & Wheels

Body: CEN "Intruder", High Impact Lexan
Tires: CEN "X" Cellerator
Wheels: Light Weight 17mm

Suspension

Mounting Positions Front: Six upper, two lower
Mounting Positions Rear: Six upper, two lower
Shocks: Machined aluminum, with HD 3.5mm shafts (Composite shocks on sport version)
Springs: Medium Tension

Chassis

Type: 3mm thick, 6061 Aluminum
Radio Tray: Low Center of Gravity servo mounts
Braces: Composite brace

Drive-train

Type: Shaft driven all-time 4WD with center differential
Drive Shafts: Constant Velocity Shafts/ Lighten driveshaft
Differentials: Sealed, super strong 6 gear style, silicon filled with cross pins
Clutch: Composite 3 shoe clutch system
Bearings: Full set of precision sealed bearings

Dimensions:

Length: 485mm (19.09")
Width: 305mm (12.00")
Weight: 3181g (7lbs)
Wheelbase: 330mm-336mm (12.99"-13.2")

www.cenracing.com

CEN

*Specifications are subject to change without prior notice.
*●All rights reserved.

Tools

The following tools are necessary to make assembly & maintenance of your new R/C car. both easier & more enjoyable. For your safty, exercise care when using any hand tools, sharp instruments, or power tools during construction. Always use safty glasses. If you have any questions, please consult your local hobby shop or experienced friend.



Hexagon wrench
1.5mm, 2mm, 2.5mm,3mm.

Cross wrench (hexagon socket tools)
5.5mm, 7mm, 8mm, 10mm, 12mm, 17mm.

Hobby scissors
For cutting and trimming the car's body, decals.

Grease
Lubrication of gears; reduces friction.

Glue
Use to glue tires onto the wheels; temporary repairs.

! Always use hand and eye protection with cyanoacrylic glue.

Threadlock
For locking screws and nuts to prevent loosening.

Hobby knife
Use for trimming and cutting.

! This knife cuts plastic and fingers with equal ease, so be careful

Flat blade screwdriver

Phillips screwdriver

Needle nose pliers
Clamping parts during assembling and disassembling

Hand drill
2mm, 3mm, 6mm.

Soldering iron (40~50 watts) and a small amount of solder.

! Be careful iron is very hot

Liquid dish soap



Ruler

SAFETY PRECAUTIONS

- This radio controlled model is not a toy. For yours and others safty, the following guidelines and cautions should be followed carefully.
  WARNING: Do not operate R/C car in the following locations:
  1. Street
  2. Crowded area; keep away from children.
  3. Indoors or an unventilated room.

  SUGGESTION: Outside in a large open area without obstructions; R/C race track.
- This kit uses many kinds of small parts, sharp tools, large polybag, and chemical materials. Please keep these and other potentially harmful items away from children.
- Use only FCC approved ground frequency crystals in the R/C unit.
- Do not operate a Gas powered car in a residential area. The noise could disturb the peace.
- If you are operating several cars together, check the frequencies to make sure none are the same. Operating the cars on the same frequency can cause radio interference and loss of control of the car.
- If the car is not operating properly, stop immediately and check the condition of the car.
- To avoid damage to the R/C equipment, or losing control of the car, avoid running in or near water.
- To always maintain control of your car and to avoid a jump start, Please do the following:
  1. ON - First turn on the transmitter, then the car's receiver. 2. OFF - Turn off the car's receiver, then the transmitter.
- Do not touch the R/C car after operation, as the engine, muffler, electric motor, battery, and speed controller will be very hot! Allow to cool before handling. While charging your car's battery, it could become hot. Carefully read your battery charger's instructions for proper use.
- When the R/C car is in operation, do not touch any of its moving parts such as drive shafts, wheel ,etc., as the rotating parts can cause serious injury.
- After operation of the R/C car, it is necessary to remove the battery for protection of the R/C equipment.
- Paint and grease are extremely flamable, keep away from sources of ignition. Do not puncture or throw away spray paint cans into garbage.

01 Shock Assembly

01-01 Shock Shaft (Front*2 , Rear*2)

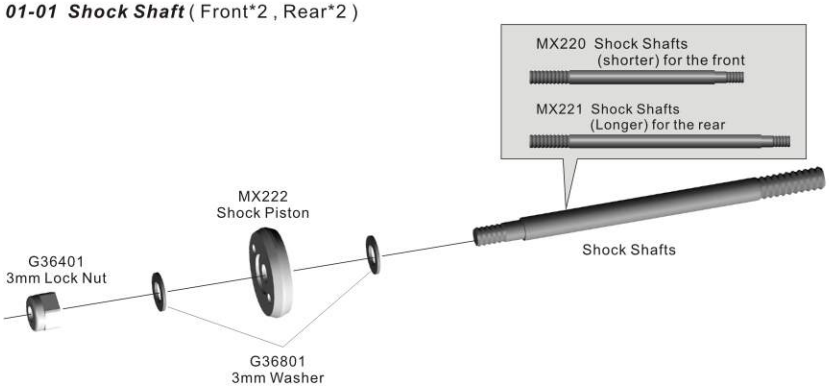

01-02 Shock Body (Front*2 , Rear*2)

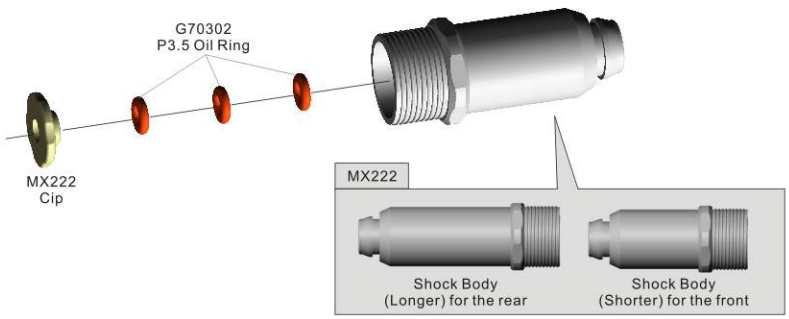

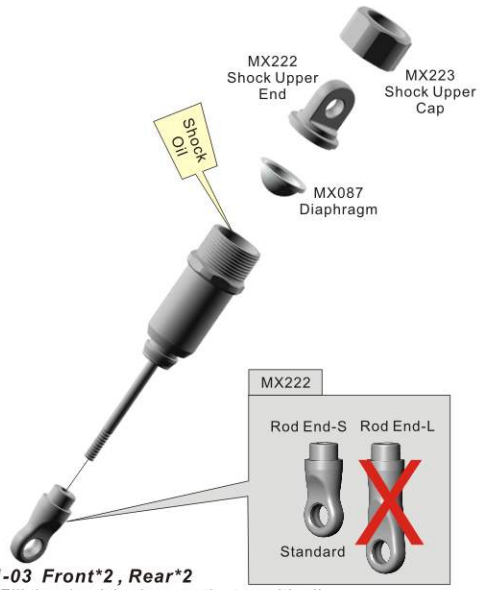

01-03 Front*2 , Rear*2

1. Fill the shock body up to the top with oil.
2. Slowly push the shock shaft in and out to remove all air bubbles. If oil level drops do not let the piston come out of the oil.
3. Once you have all the air bubbles worked out ,fill the shock with more oil; bring the level to up to the top.
4. Put the rubber diaphragm on ,then slowly tighten down the shock cap.
5. Loosen the shock cap 1/2-3/4 turn and slowly press the shock shaft all the way in.
6. With the shock shaft pressed all the way in tighten down the shock cap.
7. Shocks should feel smooth. If you feel air bubble remove cap and add little more oil and repeat. If shock shafts don't go all the way in you need to bleed alittle more oil out.

01-04 Front*2 , Rear*2

1. Clip the spring retainer onto the lower shock eyelet carefully securing the bottom of the shock boot at the same time.
* Use the Preload spacers on the shocks for adjusting the preload of the springs. (If needed)

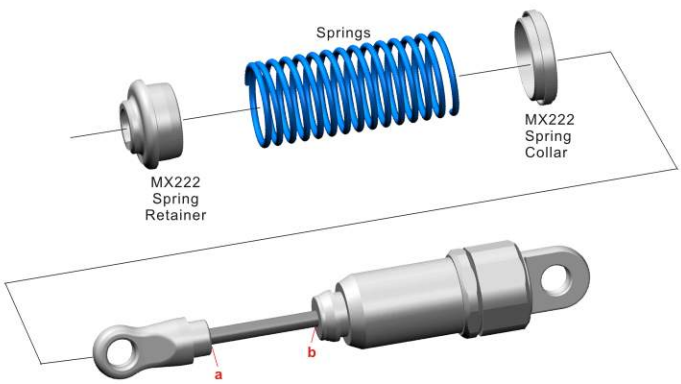

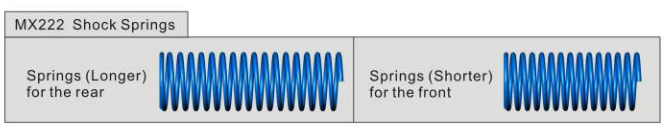

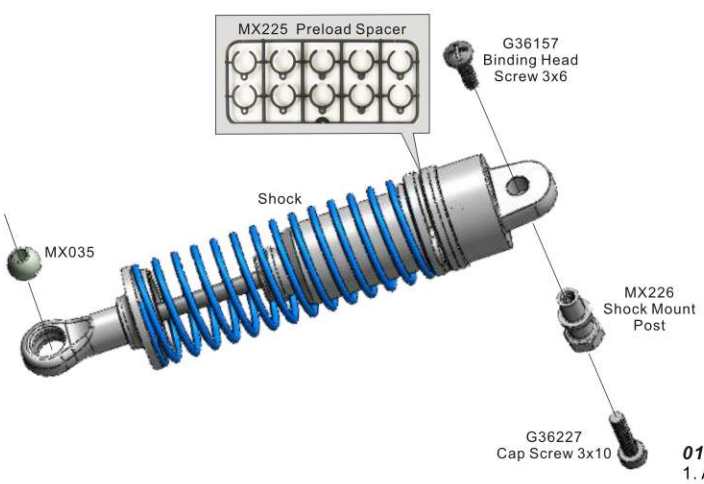

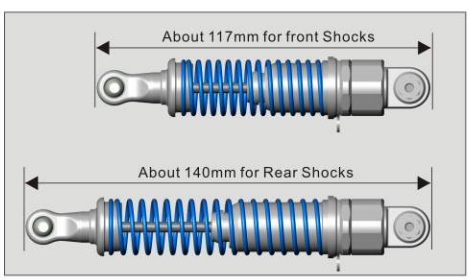

01-05 Front*2 , Rear*2

1. Assemble as shown. The MX226 upper shock mount will be attached to the shock towers in a later step.

02 Center Differential

02-01 *2

1. Follow the diagram for the front and rear differential assemblies.

02-02 *2

1. Insert the GS231 differential Planet gears onto the cross pins making sure that they spin freely on the shafts.
2. Next slide on the washers behind each differential Planet gear.
3. Slide the cross pins with the differential Planet gears down into the differential case.
   NOTE: the differential case has specific grooves in which the cross pins must slide into.

02-03 *2

1. Follow diagram for Cross Pin and Diff Planet Gear then slide into the diff housing.
2. Rotate the outdrive to check for smooth operation.

02 Front and Rear Differential

02-04 *2

1. Fill the housing up with oil just slightly below the top of the gears.
2. Secure the diff case cover using four 3x10 screws.
3. Make sure differentials are smooth.

02-05

1. Insert the MX231 differential Planet gears onto the cross pins making sure that they spin freely on the shafts.
2. Next slide on the washers behind each differential Planet gear.
3. Slide the cross pins with the differential Planet gears down into the differential case.
   NOTE: the differential case has specific grooves in which the cross pins must slide into.

02-06

1. Using four G36541 screws, secure the differential ring gear to the differential case.
   NOTE: Do not over tighten the screws as this may strip the holes and cause leaking.

03-01 Steering Assembly

1. Assemble as shown in the diagram.
2. Tighten down the servo saver nut until you have about 6mm of threads showing.

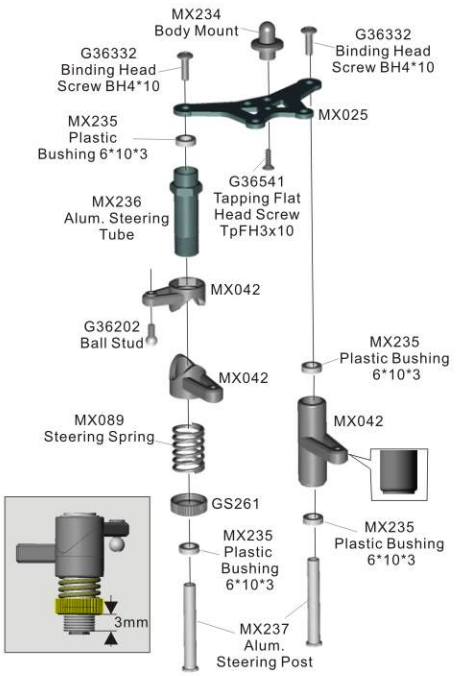

03-02 Steering Rod*2

1. Thread two CT032 rod ends onto the tie rod. Make sure both eyelets are screwed on evenly.
2. Gently press one GS017 ball into each eyelet.

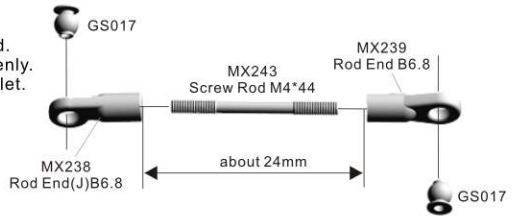

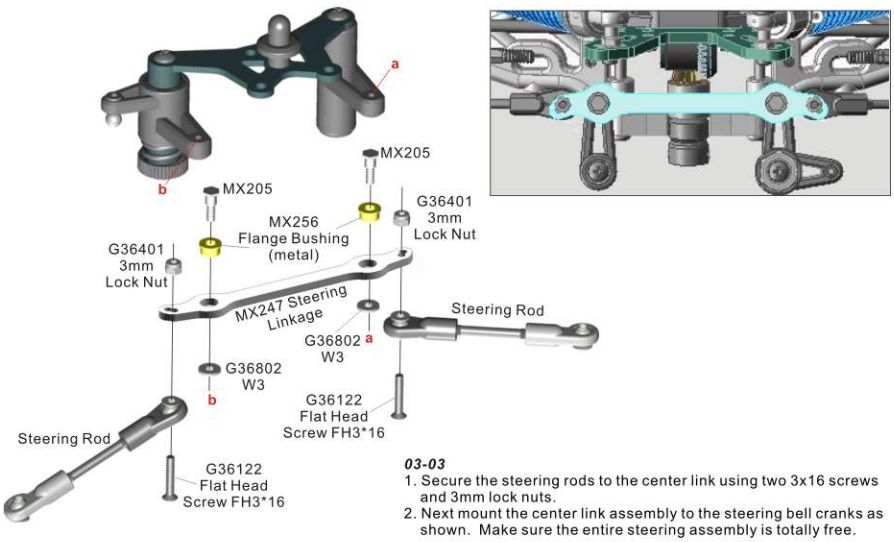

03-03

1. Secure the steering rods to the center link using two 3x16 screws and 3mm lock nuts.
2. Next mount the center link assembly to the steering bell cranks as shown. Make sure the entire steering assembly is totally free.

03-04 Upper Arm*2

1. Thread the G36274 Screw Rod into the MX245 upper arm and MX240 eyelet.
   * We recommend you take a look at the thread pattern and get them to match from left to right. Be sure do not overtighten
2. Repeat one more time.

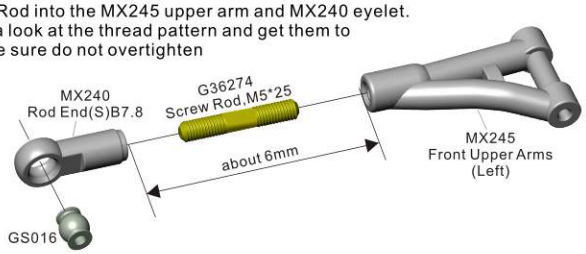

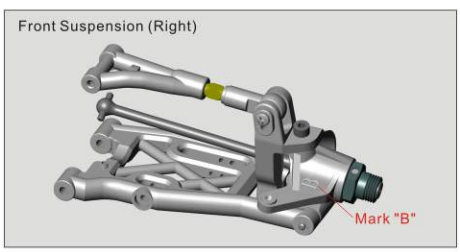

03-05 Front Suspension (Left)

1. Assemble the left front suspension assembly as shown.
2. * We recommend you use thread lock on the four 4x10 screws going into the MX008 aluminum spindles.
3. Screw the 4x12 down travel set space screw in until the bottom is flush with the arm. We will make final adjustments later.

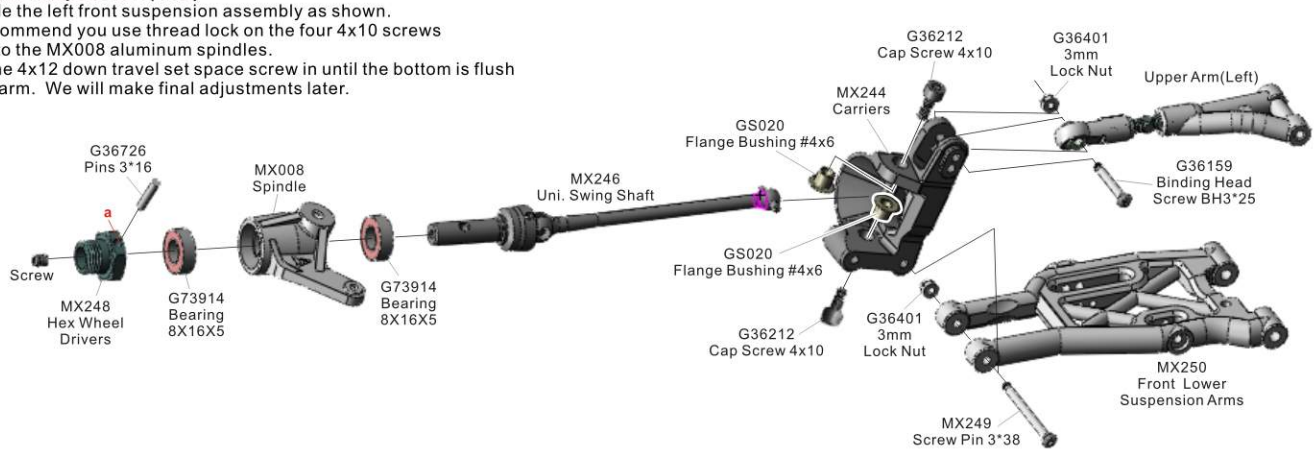

03-06 Front Bulkhead

1. Mount the upper suspension arm support to the MX007 front bulkhead using two 4x15 screws.
2. Secure the MX019 Front shock tower to the bulkhead using four 4x12 button head screws.

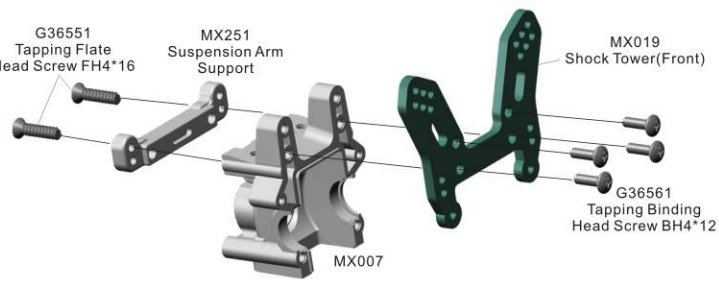

03-07 Front Bulkhead

1. Insert two 8x16x5 bearings into the front bulkhead as shown.
2. Insert the MX255 driving gear through both 8x16x5 bearings followed by your differential.
   * Look for a small arrow on the bottom of the bulkhead; this is the side the differential gear should go on.
3. Seal the front bulkhead using two 3x18 screws.

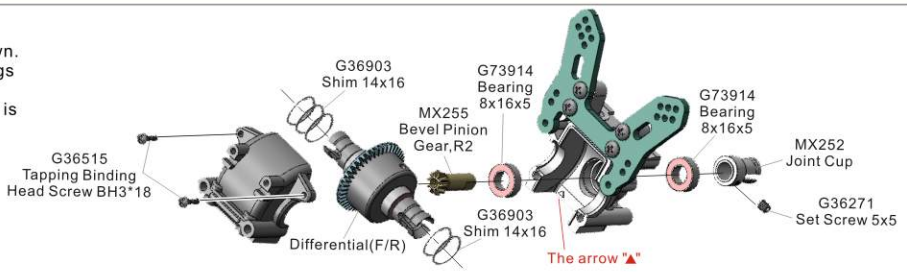

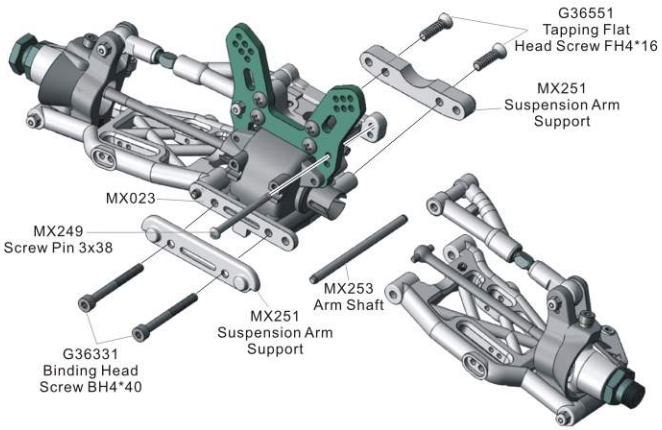

03-08 Front Suspension

1. Attach the front left suspension arm assembly to the front bulkhead as shown.
   The short pin is used for the upper arm and the longer pin for the lower arm.
2. Repeat for other side.

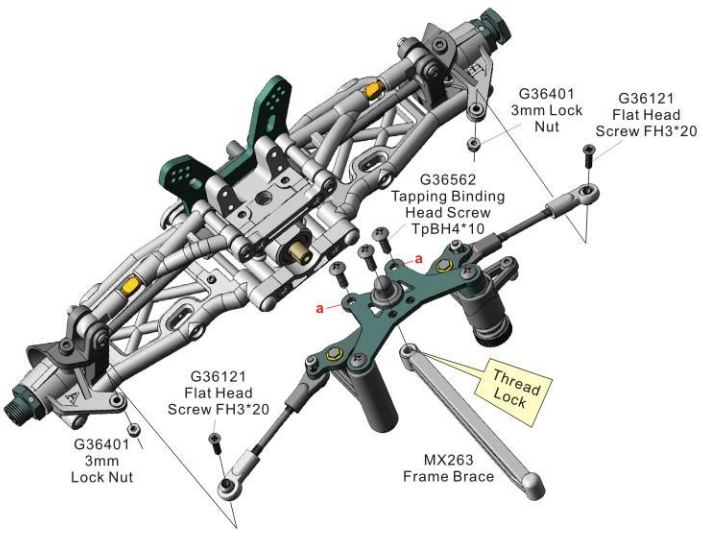

03-09 Steering Saver

1. First attach the MX263 Frame brace to the front upper plate using one 4x10 button head screw.
2. Attach the steering assembly to the front bulkhead using two 4x10 screws.
3. Finish this step by mounting the steering rods to the spindles using 3x20 screws and lock nuts.

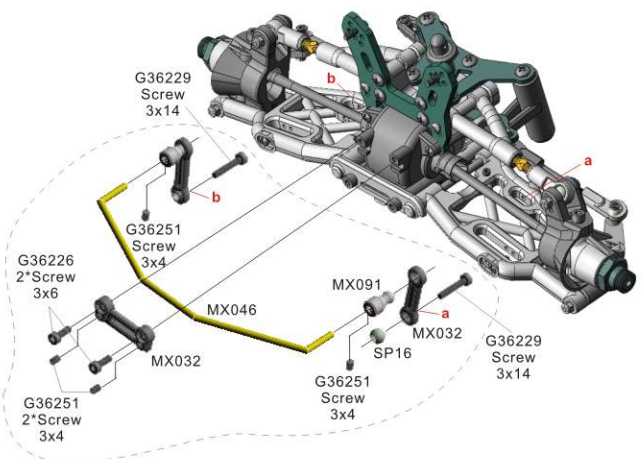

03-10 Front Sway Bar *(Not Included)*

1. Assemble the sway bar as shown.
2. Don't tighten down the setscrews until sway bar is fully installed. Then with everything sitting flat, tighten the setscrews.

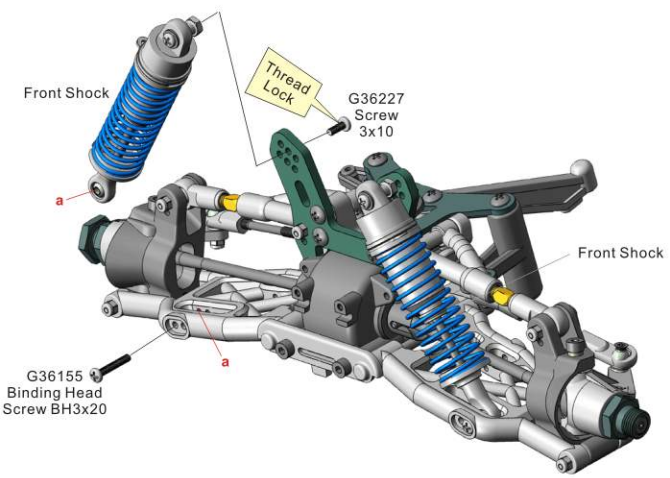

03-11 Front Shock

1. Mount the shocks to the upper shock tower using 3x10 screws. We suggest using the upper inside hole.
2. Mount the lower shocks to the suspension arms using 3x20 screws. We suggest using the outside hole on the arm.

03-12 Center Driveshaft

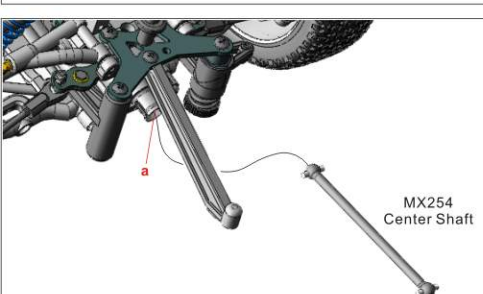

04-01 Rear Bulkhead

1.Secure the MX20 shock tower to the MX007 bulkhead using four 4x12 button head screws.
2.Secure the MX251 arm support to the bulkhead using two 4x16 screws.

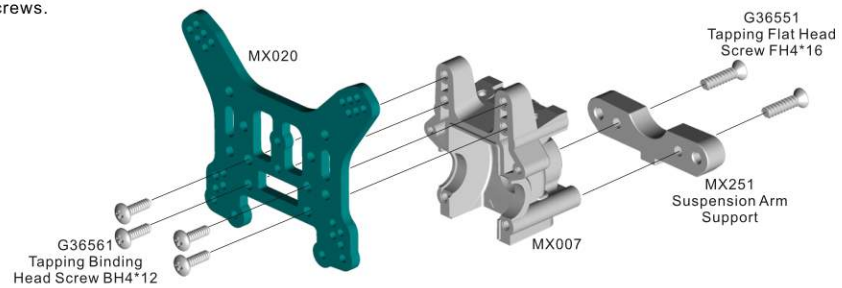

04-02 Rear Bulkhead

1. Insert two 8x16x5 bearings into the rear bulkhead followed by the MX255 driving gear.
2. Insert the rear differential into the housing making sure the gear is on the side with the arrow on the bottom of the case.
3. Close the case with the second half and two 3x18 screws.

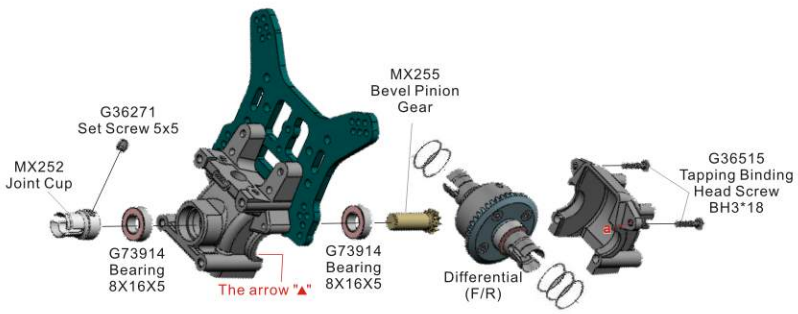

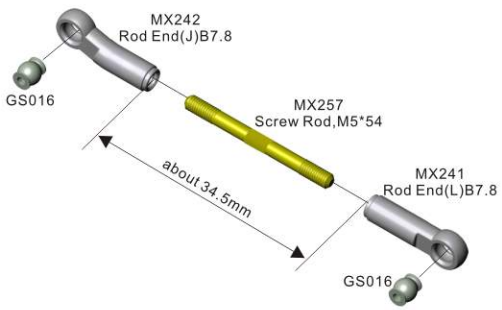

04-03 Upper Rods*2

1. Thread one Rod End onto each side of the MX257 tie rod.
2. Snap one GS016 ball into each eyelet.
3. Repeat on other rod.

04-04 Rear Suspension (Right)

1. Assemble the driveshaft as shown.
2. Press Two 8x16x5 bearing into each side of the MX260 hub.
3. Insert assembled driveshaft through the bearings and the hub.
4. Align the MX248 wheel hex with axle and press pin in. Secure with set screws.
5. Attach the assembled hub assembly to the lower suspension arm using one MX262 hinge pin, spacer and 3mm Lock Nut. Make sure the spacer is towards the back of the car.
6. Secure the upper rod to the hub using one 3x25 screws and 3mm lock nut.
7. Repeat for left side.

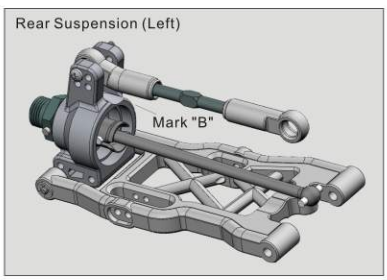

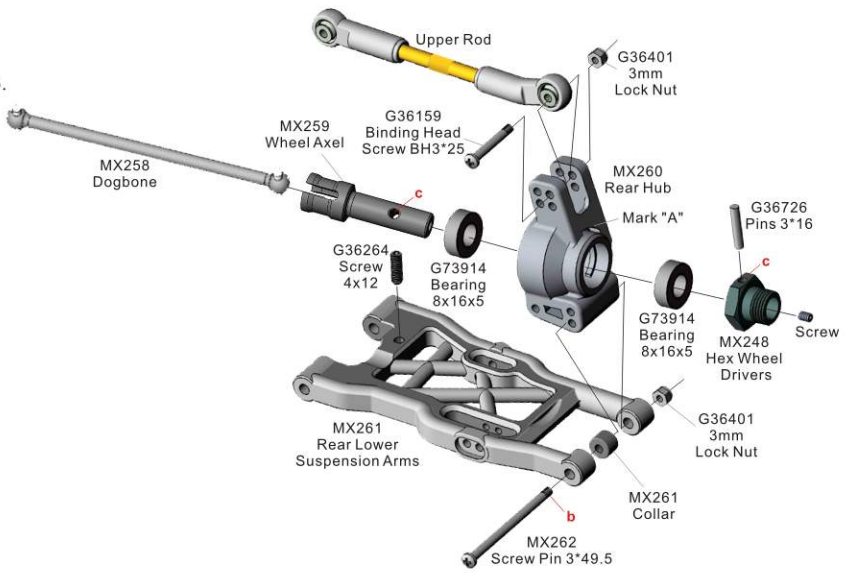

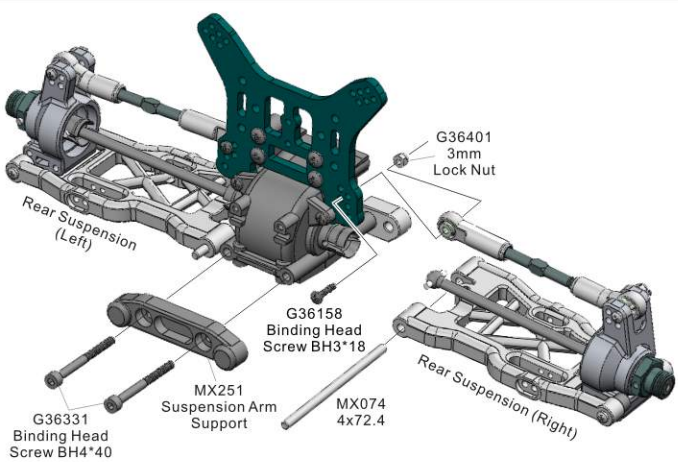

04-05 Rear Suspension

1.Attach the rear suspension arms to the rear bulkhead as shown.
2.Secure assembly using two 4x40 screws.

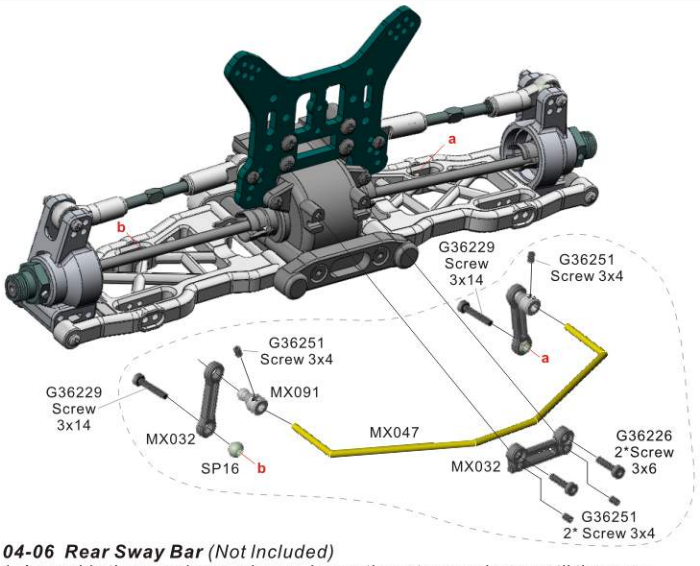

04-06 Rear Sway Bar *(Not Included)*

1. Assemble the sway bar as shown. Leave the setscrews loose until the sway bar is secure.
2. Once you have all everything correctly secured, lay the car on a flat surface. Then tighten down the setscrews.

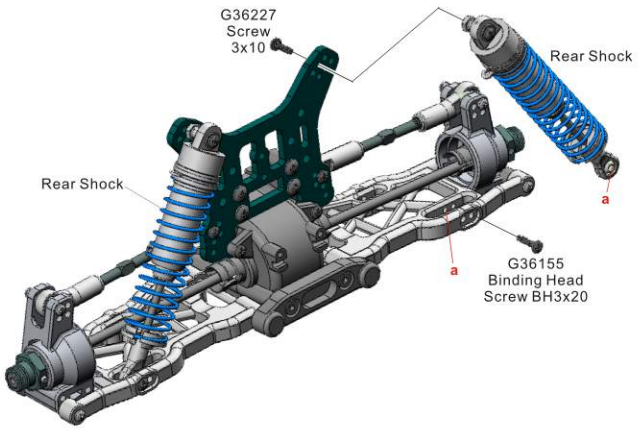

04-07 Rear Shock

1. Secure the shocks to the shock tower using two 3x10 screws. We suggest using the upper inside hole.
2. Mount the shock to the outer hole on the suspension arm using 3x20 screws.

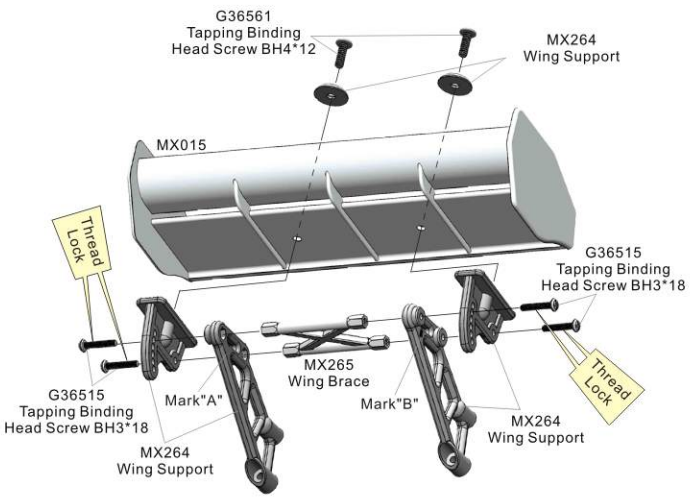

04-08 Tail Wing

1. Start by putting two 3x18 screws through the wing mount and the wing support, screwing into the wing braces. * Thread lock recommended.
2. Repeat for other side.
3. Secure the MX015 wing to the wing assembly using two 4x12 screws and MX264 plastic washers.

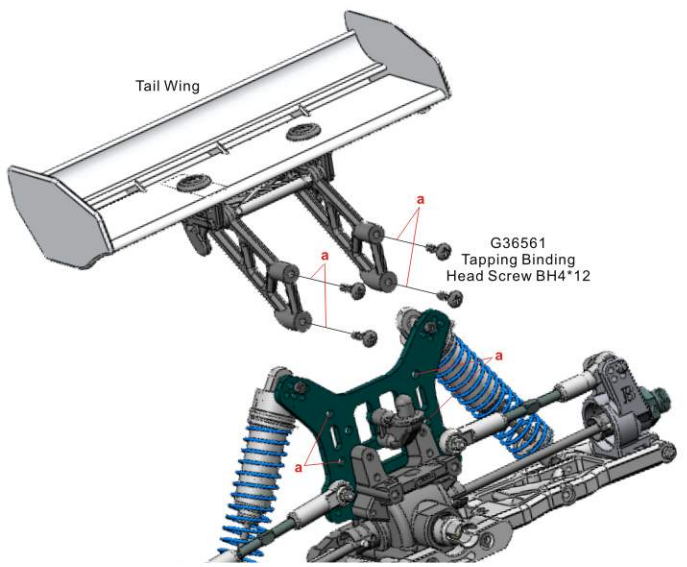

04-09 Tail Wing

1. Mount the entire wing assembly to the rear shock tower using four 4x12 button head screws.

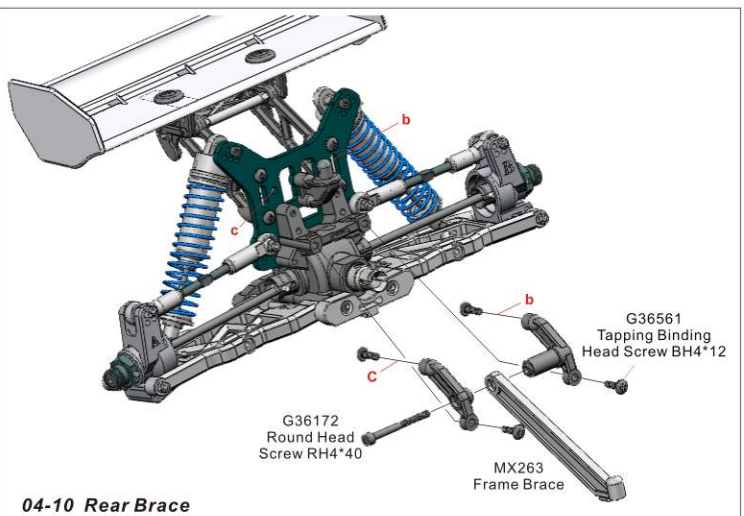

04-10 Rear Brace

1.Mount the rear body mount to the shock tower using two 3x10 screws.
2.Mount the rear chassis brace between the two chassis support brackets as shown.
3.Secure the brackets to the rear end using four 4x12 screws.

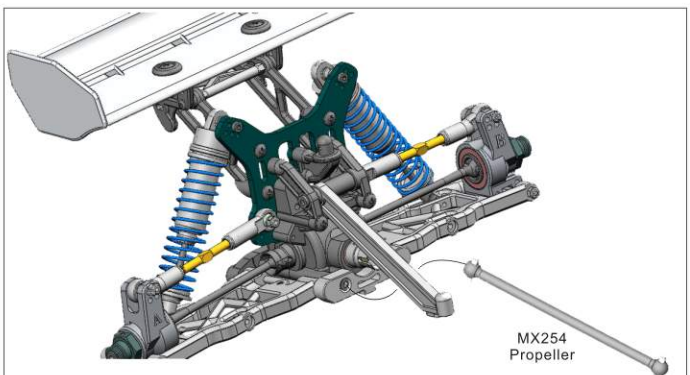

04-11 Propeller

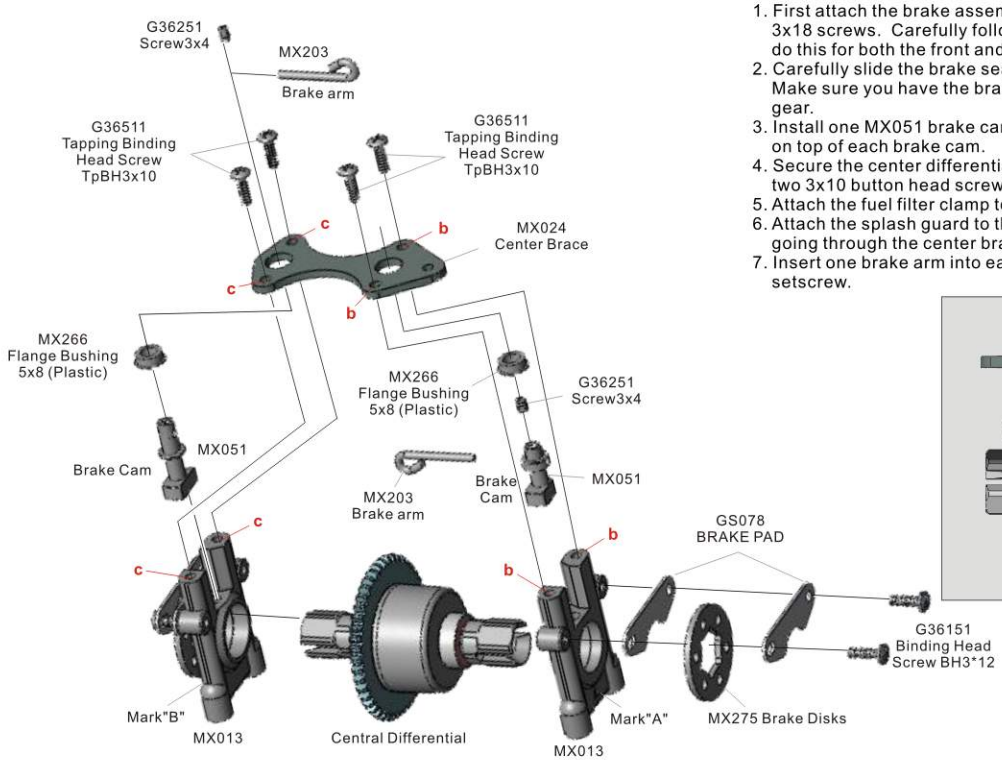

05-01 Center Gear

1. First attach the brake assemblies to the center brake seats using two 3x18 screws. Carefully follow the order in the picture. You will need to do this for both the front and rear brake seats.
2. Carefully slide the brake seats with disks onto the center differential. Make sure you have the brake seat marked "A" on the side with out the gear.
3. Install one MX051 brake cam into each brake seat. Install one bearing on top of each brake cam.
4. Secure the center differential brace to the brake seat marked "B" using two 3x10 button head screws.
5. Attach the fuel filter clamp to the splash guard using one 3x10 screw.
6. Attach the splash guard to the "A" brake seat using two 3x10 screws going through the center brace as shown.
7. Insert one brake arm into each brake cam and secure with one 3x4 setscrew.

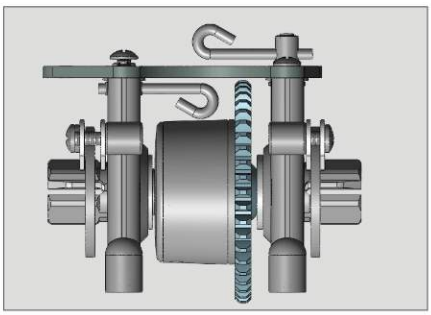

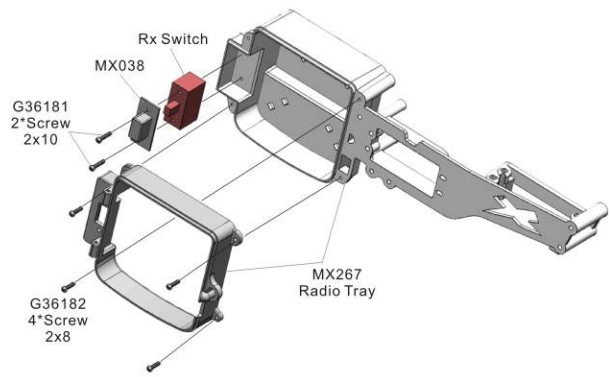

05-02 Radio Tray

1. Mount your on/off switch using two 2x10 screws and MX038 rubber cover into the upper half of the receiver box.
2. Secure the two sides of the receiver box together using four 2x8 screws.

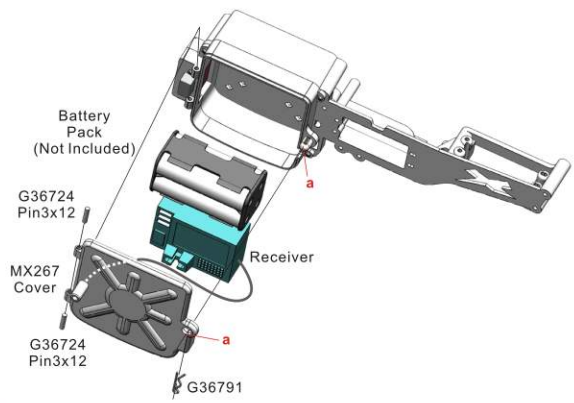

05-03 Radio Tray

1.Align the receiver box lid and box and press the 2x12 pins into each side of the hinge.
2.Install your receiver and battery and secure lid with a single body clip.

05-04 Radio Tray

1. Secure your steering servo to the servo bracket with four 3x14 screws.
2. Next mount your throttle servo using just Four 3x14 screws.

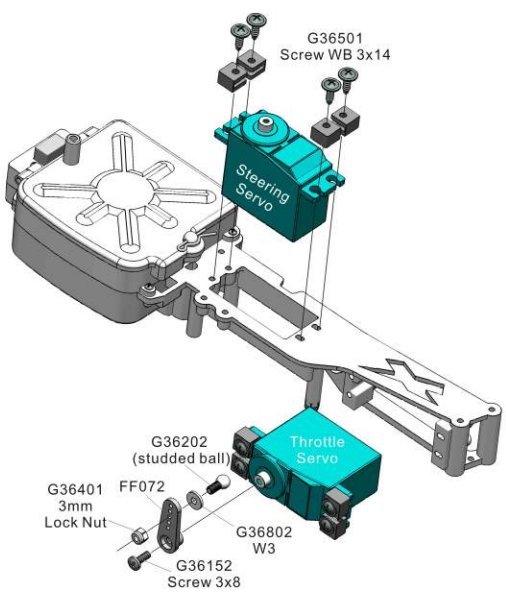

06-01 Engine Mount

1. Secure two engine mounts to your engine using four 3x14 screws.
   * Carefully look at each mount and you will see that the distance from the edge to the hole is different on each side. Make sure the edge with the shorter distance to the hole is closest to the rear (pull start side) of the engine.
   * Thread lock recommended on these screws.
2. Install your glow plug if it has not been done already for you at this time.

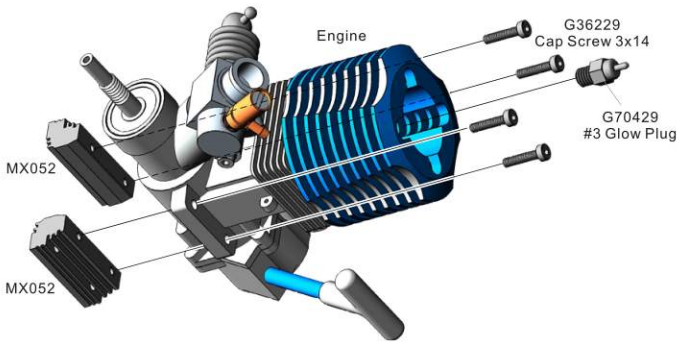

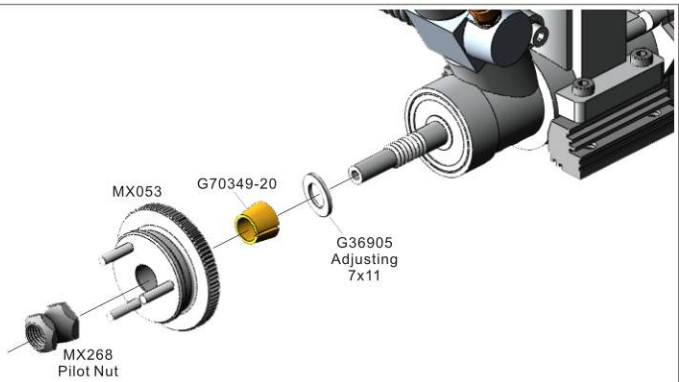

06-02 Flywheel

1. Slide one 7x10 shim onto the crankshaft followed by the cone.
2. Slide the flywheel onto the crankshaft centering it on the cone.
3. Grip the flywheel with large pliers and tighten the pilot nut down.
   * You want to make sure this is very tight.

06-03 Clutch Shoes

1. Install one clutch spring into each shoe as shown.
2. Put the shoe with the spring onto the pin found on the flywheel.
3. Once it's about 1/2 way down the pin, you will need to pull the small part of the spring back and press the shoe all the way down onto the flywheel. The small part of the spring should sit in the groove on the pilot nut.
   *Recommend using a small flathead screwdriver or needle nose pliers.

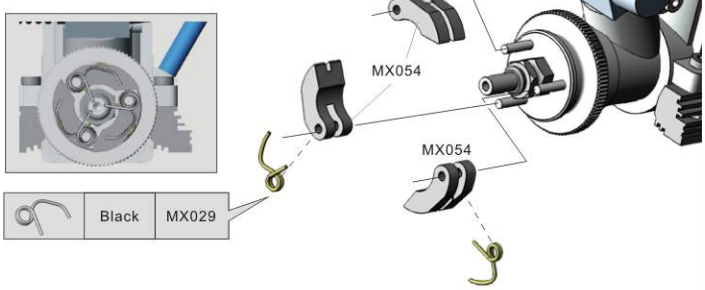

06-04 Clutch Bell

1. Install three 7x10 shims onto the pilot shaft.
2. Press two bearings into the clutchbell then slide onto pilot shaft.
3. Secure with one #3 washer and 3x8 screws.
4. Make sure the clutchbell spins freely. If it's not completely free take apart and remove one of the 5x7 shims. Repeat if needed.

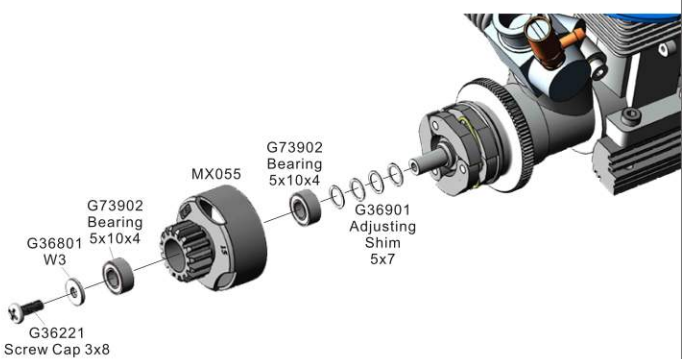

06-05 Muffler

1. Connect the MX057 manifold and GS319 pipe together using one GS024 coupler and two FF068 large zip ties.
2. Put the exhaust seal onto your engine and then carefully put the manifold and pipe onto your engine.
3. Use the supplied retaining springs to hold the exhaust onto your engine.
4. Secure you air filter to the engine using a zip tie.

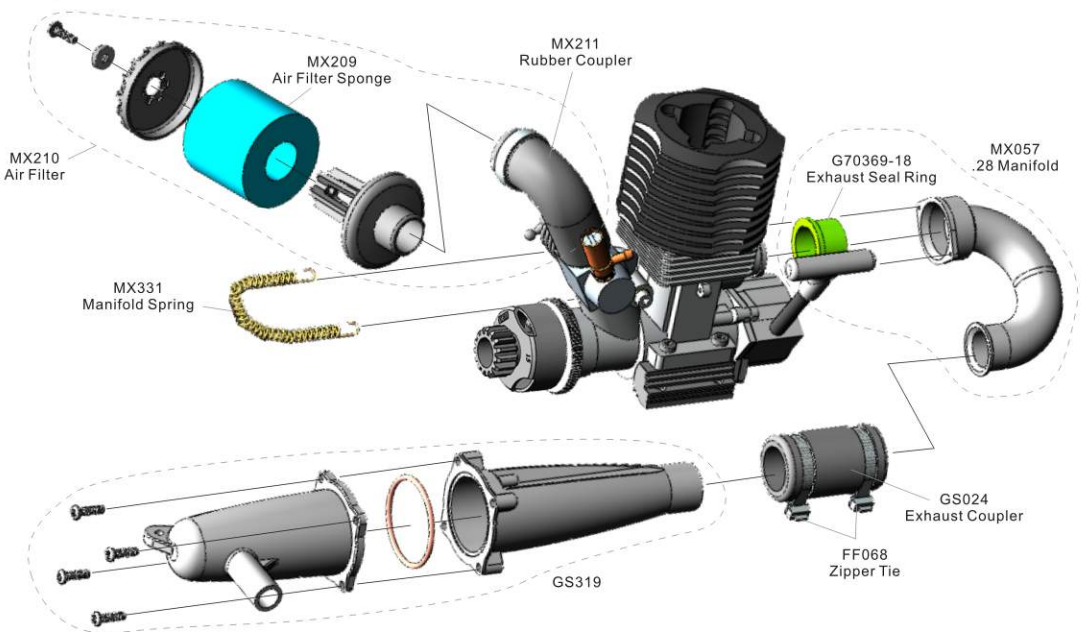

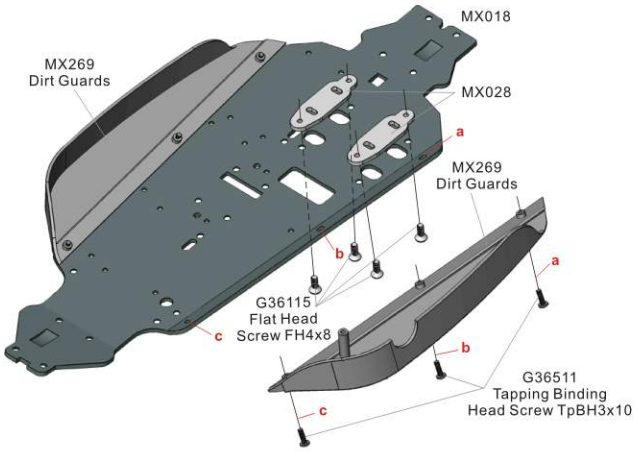

07-01 Chassis

1. Mount the side dirt guards to the chassis using three 3x10 screws. Repeat for other side.
2. Mount the engine mounting plates to the chassis using four 4x8 screws.
   * Recommend thread lock on these screws.

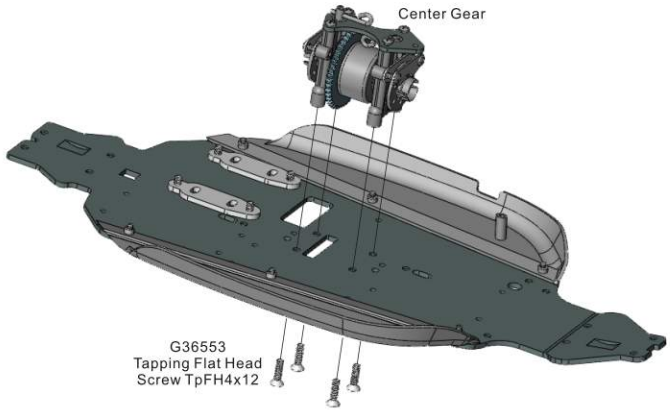

07-02 Chassis

1. Mount the center differential assembly to the chassis using four 4x12 screws. Make sure the brake disks are lined up correctly with the grooves in the diff mounts.

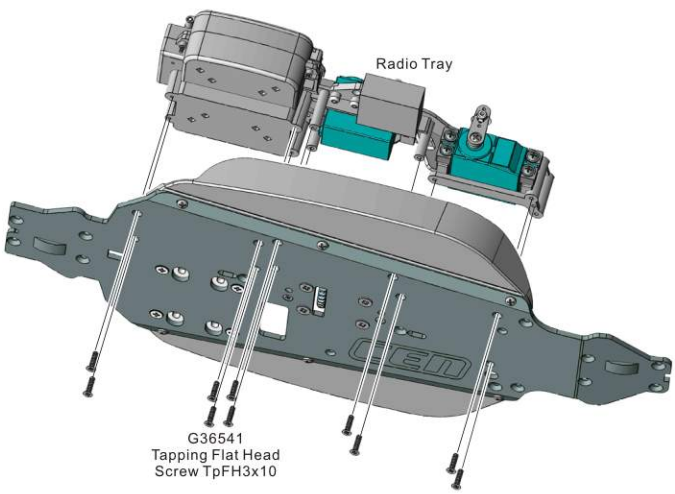

07-03 Chassis

1.Mount the radio tray assembly to the chassis using ten 3x10 screws.

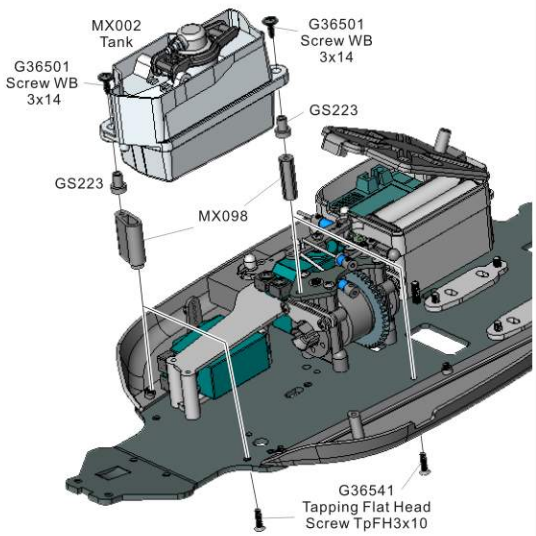

07-04 Chassis

1. Mount the fuel tank brackets to the chassis as shown using two 3x10 screws.
2. Using two rubber mounts and two 3x14 screws secure the tank to the brackets.

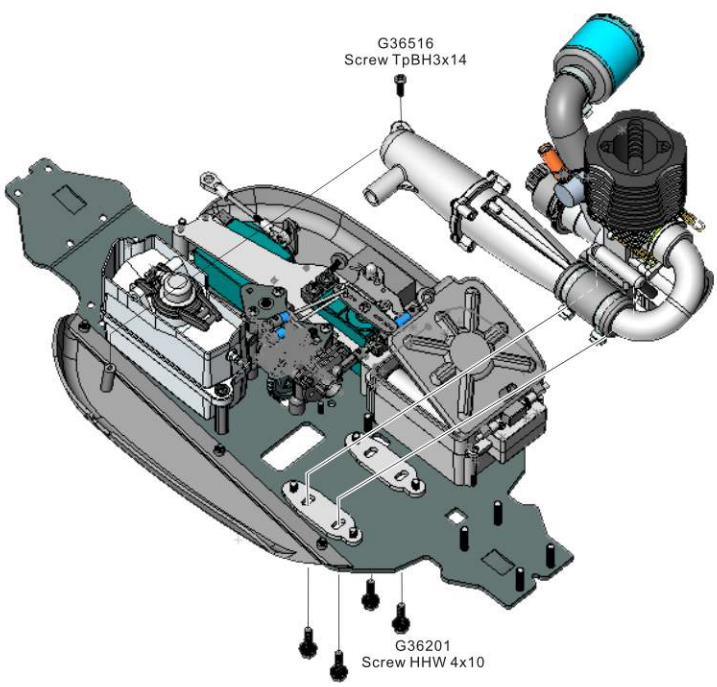

07-05 Engine

1. Mount the engine assembly to the chassis plates using four 4x10 screws.
   * Thread lock is recommended.

08-01 Rear End

1. Line up the rear center driveshaft into the center differential then secure to chassis. Make sure you use the longer 4x16 screws for the rear holes and the shorter 4x12 screws for the forward holes and chassis brace.

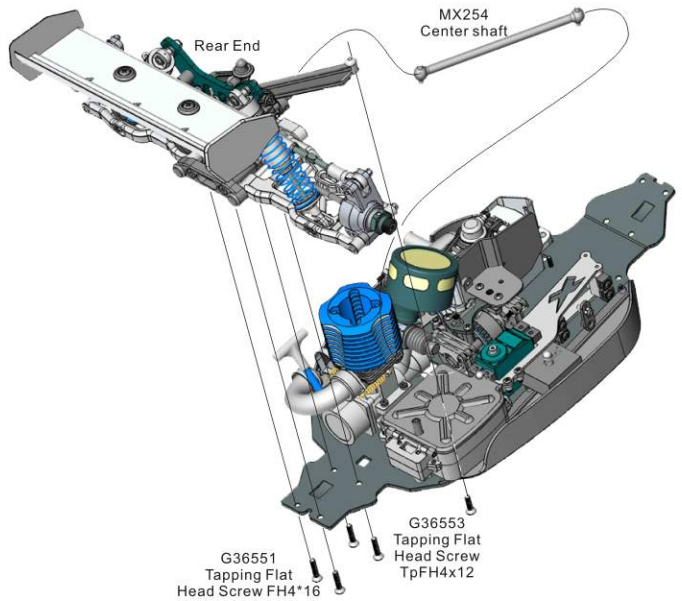

08-02 Front End

1. First line up the front center driveshaft into the center differentials outdrive then mount front end to the chassis.
   * Makes sure you use the correct screws as shown in the diagram. Use the two long 4x16 screws in the front holes making sure you have the bumper correctly installed first.
   * Use five 4x12 screws for the steering posts, chassis brace, and the rear bulkhead.

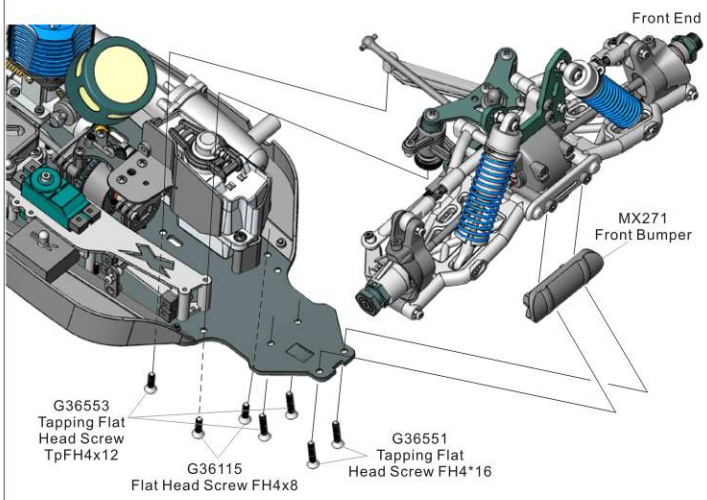

08-03 Con-Rod

1. Install all the throttle linkage as shown in the diagram.
   *First put the brake rods through the brake levers and put the MX022 cone, spring and collet and then tighten down the setscrew. Do this with both brake rods.
2. Secure the throttle rod to the servo arm using one 2x10 screws . Snap the throttle rod onto the ball located on the carburetor.
3. Secure the brake bracket assembly to the servo arm using two 2x8 screws.
4. Mount the servo arm to the throttle servo using the screw supplied with your servo.
5. Snap both sides of the steering rod onto the ball stub on the servo arm and steering bell crank.
6. Adjust the length of the steering rod so the steering bell cranks is 90' to the side and the servo arm is straight up.

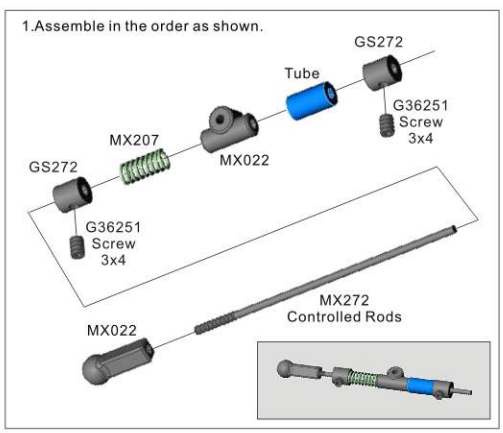

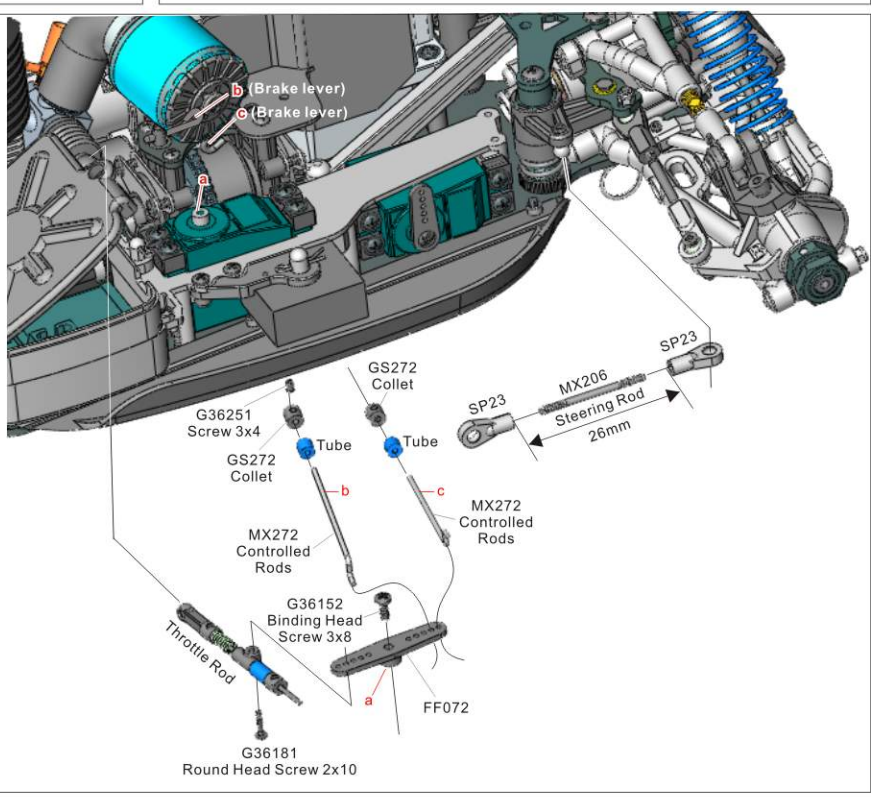

08-04 Wheel*4

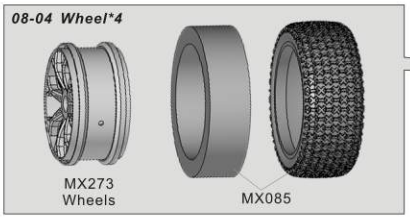

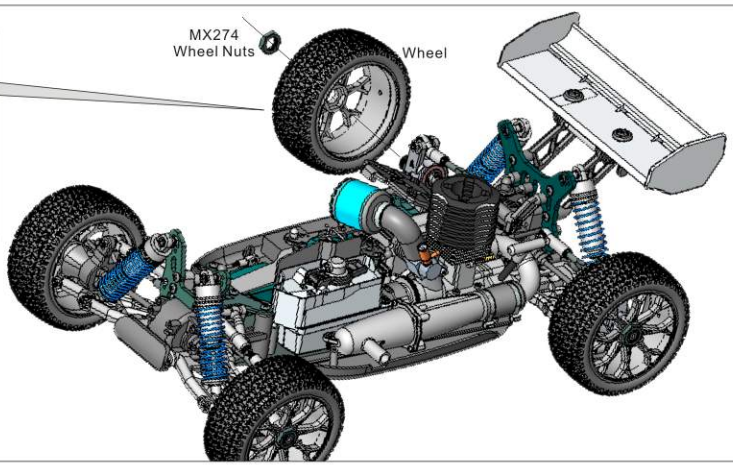

08-05 Wheels

1. Mount the foam inside the tire then glue to the wheel using C.A. glue.
2. Allow glue to full dry then secure to the car using MX072 wheel nuts.

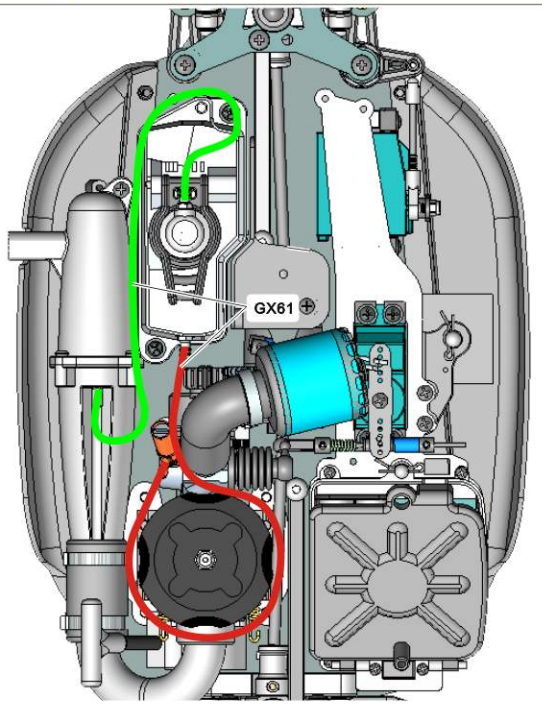





08-06 Fuel Tube

1. This is the correct layout for your fuel line. Make sure the fuel line coming from the pipe goes into the lid of the tank.

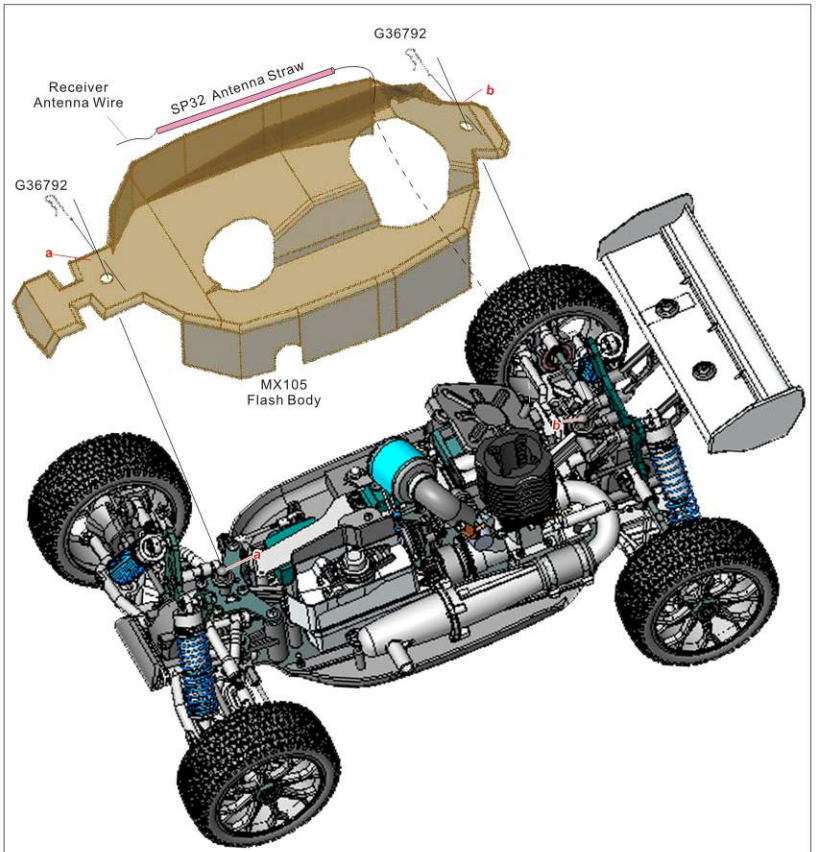

08-07 Flash Body

1. After you have painted the body, mount it to the car by drilling out the holes for the body mounts.
2. Cut a hole large enough to clear the engine head and a hole in the windshield to be able to fully open the fuel tank. This hole will also provide additional airflow to your engine.
3. Secure the body with two large body clips.

G70373 Engine 28

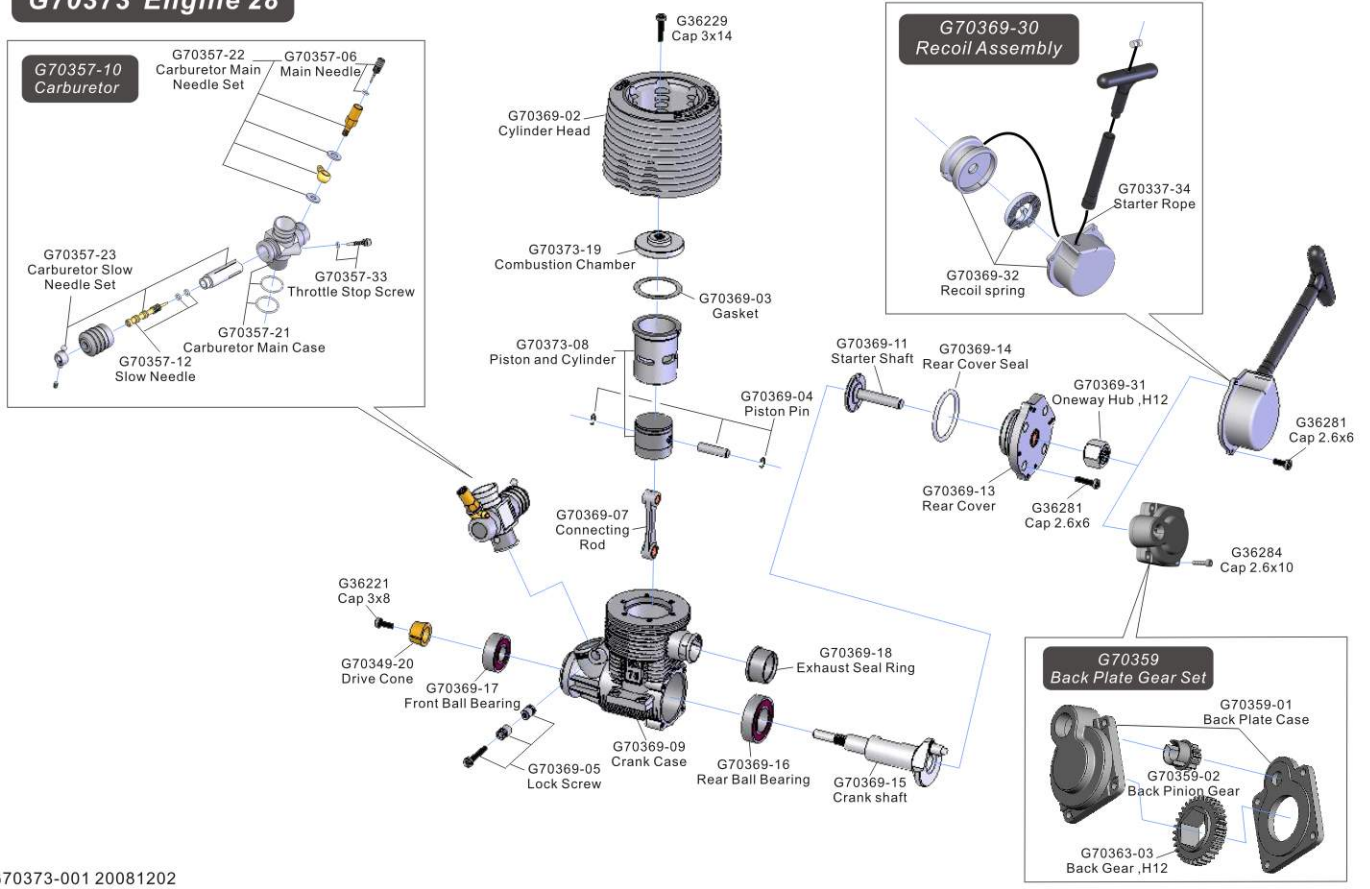

G70373-001 20081202

Frame

Spare Parts	
MX007	Gear Box
MX008	Spindle
MX013	Center Diff. Mount
MX015	Wing
MX018	Main Chassis
MX019	Shock Tower (Front)
MX020	Shock Tower (Rear)
MX022	Controlled Linkage Plastic Set
MX023	Front Aluminum Suspension Plate
MX024	Center Brace
MX025	Upper Plate
MX028	Engine Plate
MX029	Clutch Spring 1mm
MX032	Anti-Roll Plastic Parts
MX035	Ball B6.8
MX038	Power Switch Cover
MX042	Servo Saver Plastic Parts
MX046	Anti-Roll Bar (Front)
MX047	Anti-Roll Bar (Rear)
MX051	Brake Cam Shaft
MX052	Engin Mount
MX053	Flywheel
MX054	Clutch Shoes
MX055	Clutch Bell T13
MX057	.21-.28 Manifold
MX061	Aluminum Fuel Filter
MX074	Rear Suspension Arm Hinge Pin4x74
MX085	X-Pattern Tires
MX087	Shock Diaphragm
MX089	Steering Spring
MX091	Anti-roll Pivot
MX098	Fuel Tank Mount
MX105	Flash Body Matrix R2
MX107	Matrix R2 Body (Clear)
MX202	Tube Clamp
MX203	Brake Lever
MX205	Bolt
MX206	Threaded Rod M3x40
MX207	Throttle Spring
MX208	Fuel Filter
MX209	Air Filter Sponge
MX211	Rubber Coupler
MX220	Shock Rod(Front)55.5mm
MX221	Shock Rod(Rear)67.5mm
MX222	Shock Plastic Parts
MX223	Shock Upper Cap
MX224	Shock Springs
MX225	Preload Spacer
MX226	Shock Mount Post
MX227	Brake Outdrivers
MX228	Spur Gear T46
MX229	Diff Case
MX230	Cross Pins
MX231	Diff Gears
MX232	Outdriber
MX233	Ring Gear
MX234	Body Mount
MX236	Alum. Steering Tube
MX237	Alum. Steering Post
MX238	Rod End(J)B6.8
MX239	Rod End B6.8
MX240	Rod End(S)B7.8
MX241	Rod End(L)B7.8
MX242	Rod End(J)B7.8
MX243	Screw Rod M4*44
MX244	Carriers
MX245	Front Upper Arms
MX246	Uni. Swing Shaft
MX247	Steering Linkage
MX248	Hex Wheel Drivers
MX249	Screw Pin 3*38
MX250	Front Lower Suspension Arms
MX251	Suspension Arm Support
MX252	Joint Cup
MX253	Arm Shaft
MX254	Propeller
MX255	Bevel Pinion Gear
MX256	Flange Bushing (metal)
MX257	Screw Rod,M5*54
MX258	Dogbone,R2-91.5
MX259	Wheel Axle
MX260	Rear Hub
MX261	Rear Lower Suspension Arms
MX262	Screw Pin 3*49.5
MX263	Frame Brace
MX264	Wing Support
MX265	Wing Brace
MX266	Flange Bushing 5x8 (Plastic)
MX267	Radio Tray
MX268	Pilot Nut
MX269	Dirt Giards
MX271	Front Bumper
MX272	Controlled Rods
MX273	Wheels
MX274	Wheel Nuts
MX275	Fiber BrakeDisks
MX331	Manifold Spring
GS016	Ball B7.8
GS017	Ball B6.8
GS020	Flange Bushing#4x6
GS024	Silicon Exhaust Coupler
GS078	Brake Pads
GS223	Rubber Damper
GS261	Adjusting Nut
GS272	Rod Stopper
GS319	Muffler Pipe
G36115	Flat Head Screw FH4x4
G36121	Flat Head Screw FH3*20
G36122	Flat Head Screw FH3*16
G36151	Binding Head Screw BH3*12
G36152	Binding Head Screw 3x8
G36155	Binding Head Screw BH3x20
G36157	Binding Head Screw 3x6
G36159	Binding Head Screw BH3*25
G36172	Round Head Screw RH4*40
G36181	Round Head Screw 2x10
G36182	Round Head Screw 2x8
G36201	Flange Hex Head Screw 4x10
G36202	Ball Studs B5.8xM3x14
G36211	Cap Screw 4x40
G36212	Cap Screw 4x10
G36221	Cap Screw 3x8
G36226	Cap Screw 3x6
G36227	Cap Screw 3x10
G36229	Cap Screw 3x14
G36251	Set Screw 3x4
G36261	Set Screw 4x4
G36264	Set Screw 4x12
G36271	Set Screw 5x5
G36274	Screw Rod,M5*25
G36331	Binding Head Screw BH4*40
G36332	Binding Head Screw BH4*10
G36401	Lock Nut 3
G36501	Tapping Flange Screw 3x14
G36511	Tapping Binding Head Screw TpBH3x10
G36515	Tapping Binding Head Screw Bh3x18
G36516	Tapping Binding Head Screw TpBH3x14
G36541	Tapping Flat Screw 3x10
G36551	Tapping Flat Head Screw FH4*16
G36553	Tapping Flat Head Screw TpFH4x12
G36561	Tapping Binding Head Screw BH4*17
G36562	Tapping Binding Head Screw TpBH4*10
G36714	Pins 2.5*12
G36724	Pin 3x12
G36726	Pin 3x16
G36791	Hook Pin #6
G36792	Hook Pin #8(Longer)
G36801	Washer 3x6x0.5
G36802	Washer 3x8x1
G36901	Shim 5x7
G36905	Shim 7x11x0.8
G36908	W 4*11*0.2
G70349-20	Flywheel Collet
G70369-18	Exhaust Seal Ring
G70302	Oil Ring P3.5
G70306	Oil Ring P6
G70309	Oil Ring 10
G73902	Bearing 5x10x4
G73914	Bearing 8x16x5
G70429	Glow Plug #3
GX61	Fuel Tube
FF068	Zipper Tie (middle)
FF072	Servo Horn
SP16	Ball 5.8
SP23	Rod End 5.8
SP32	Antenna Straw

Parts List

Tunned Parts	
MXS03	Factory Race CF Shock Tower (F)
MXS05	Factory Race CF Shock Tower (R)
MXS08	Factory Race CF Steering Brace
MXS10	Factory Race CF Radio Tray
MXS17	Steel Vented Clutch Bell (13T)
MXS18	Steel Vented Clutch Bell (14T)
MXS19	Steel Vented Clutch Bell (15T)
MXS25	Wheelbase Off-Set 3mm
MXS26	CNC 7075 Factory Race Center Brace
MXS27	CNC 7075 Factory Race Upper Plate
MXS34	Wheelbase Off-Set 2mm,4mm
MXS35	Wheelbase Off-Set 1mm,5mm
MXS51	CNC Rear Chassis Brace
MXS52	CNC Front Chassis Brace
MXS53	CNC Chassis
MXS54	CNC Front Shock Tower
MXS55	CNC Steering Linkage
MXS56	CNC Front Lower Arm Brace-Rear
MXS57	CNC Front Upper Plate
MXS58	CNC Rear Wheel Hub
MXS59	CNC Center Diff Frame
MXS60	CNC Center Diff Brace
MXS61	CNC Anti-squat Plate 1degrees
MXS62	CNC Anti-squat Plate 2degrees
MXS63	CNC Anti-squat Plate 3degrees
MXS64	CNC Rear Shock Tower
MXS65	CNC Steering Knuckles
MXS66	CNC Front Upper Arm Brace-Rear
MXS67	CNC Bell Crank Upper
MXS68	CNC Carrier-19degrees
MXS69	CNC Toe-in Plate 2.5degrees
MXS70	CNC Toe-in Plate 3degrees
MXS71	CNC Carrier-22degrees
MXS72	Uni. Driven Shaft
MXS73	Uni. Swing Shaft-Front
MXS74	Uni. Swing Shaft-Rear
MXS75	Diff. Outdrivers
MXS76	Diff. Brake Outdrivers
MXS77	Screw Pin4x71
MXS78	Screw Pin3x50
MXS79	Screw Pin3x38.5
MXS80	Tie Rod 5x56
MXS81	Tie Rod 5x31
MXS82	Tie Rod 5x25
MXS83	Tail Wing Post
MXS84	Shock Mount Post
MXS85	Front Shocks
MXS86	Shock Springs-S
MXS87	Shock Springs-M
MXS88	Shock Springs-H
MXS89	Shock Pistons
MXS90	Rear Shocks
MXS91	Steel Brake Disk
MX086	Shock Dust-proof Boots
MXS92	Wheels (Yellow)

MATRIX R2 Upgrades

1/8 Ready to Run Buggy

MXS67 CNC Bell Crank Upper

MXS69 CNC Toe-in Plate 2.5degrees
MXS70 CNC Toe-in Plate 3degrees

MXS17 Steel Vented Clutch Bell (13T)
MXS18 Steel Vented Clutch Bell (14T)
MXS19 Steel Vented Clutch Bell (15T)

MXS68 CNC Carrier-19 degrees
MXS71 CNC Carrier-22 degrees

MXS60 CNC Center Diff Brace

MXS64 CNC Rear Shock Tower

MXS75 Diff. Outdrivers

MXS06 CF Factoty Race Center Diff Brace

MXS59 CNC Center Diff Frame

MXS57 CNC Front Upper Plate

MXS85 Front Shocks
MXS90 Rear Shocks

MXS20 CNC Alum. 3P Clutch Shoes
GSS16 CNC Clurch Shou (Heavy)

MXS54 CNC Front Shock Tower

MXS07 CF Factory Race Upper Plate-F

MXS03 CF Factory Race Shock Tower-F

MXS05 CF Factory Race Shock Tower-R

MXS76 Diff. Brake Outdrivers

MXS56 CNC Front Lower Arm Brace-Rear

MXS08 CF Factory Race Steering Brace

MXS61 CNC Anti-squat Plate 1 degrees
MXS62 CNC Anti-squat Plate 2 degrees
MXS63 CNC Anti-squat Plate 3 degrees

MXS58 CNC Rear Wheel Hub

MXS55 CNC Steering Linkage

MXS51 CNC Rear Chassis Brace
MXS52 CNC Front Chassis Brace

MXS73 Uni. Swing Shaft-Front
MXS74 Uni. Swing Shaft-Rear
MXS72 Uni. Driven Shaft

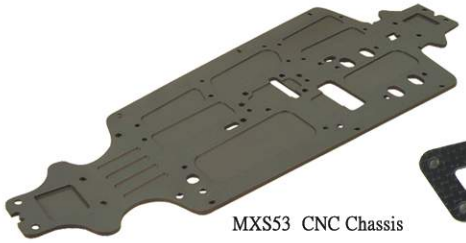

MXS53 CNC Chassis

MXS10CF Factory Race Radio Tray

CENCHAIN CO., LTD.
No.16, LANE 105, CHENG FU RD,
SANHSIA, TAIPEI HSIEN TAIWAN, R.O.C
TEL: 886-2-26681881
FAX: 886-2-26681899
E-mail: rchobby@ms11.hinet.net

CEN/GTC
1800 E. Miraloma Ave., #F,
Placentia, CA 92870 USA
TEL: 1-714-792-1923
FAX: 1-714-792-1968
E-mail: sales@cenracing.com

CEN
www.cenracing.com